


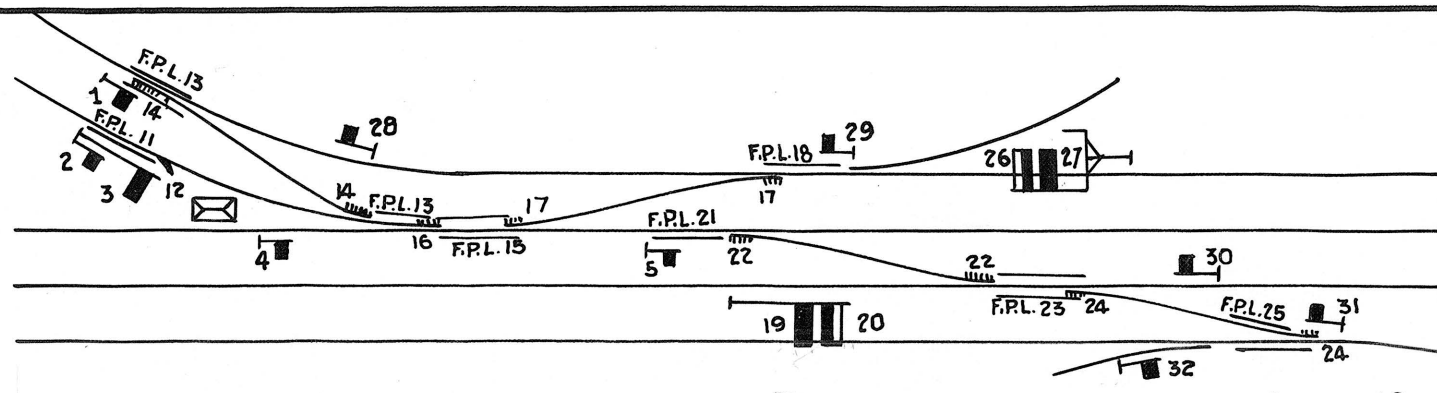

Levers 1-2-3-4-5-6-28-29-30-31-32 to have 11" stroke front and back and to be equipped with adjustable shackle #9908
 Levers 7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-25-26-27 to have 8 1/2" & 9 1/2" stroke front only.
 Levers to have standard D.L. & W. shoe #19253. Tail levers to be straight and separated as in Style "A" type of interlocker. 2 way locking bracket caps to be used.


EAST BUFFALO, N.Y.
 CONTRACT. 1240CM
D. L. & W. R.R.
GENERAL RAILWAY SIGNAL CO., ROCHESTER, N.Y.

25732

DOG CHART

R-12142 10-22-09

Oct-23-09

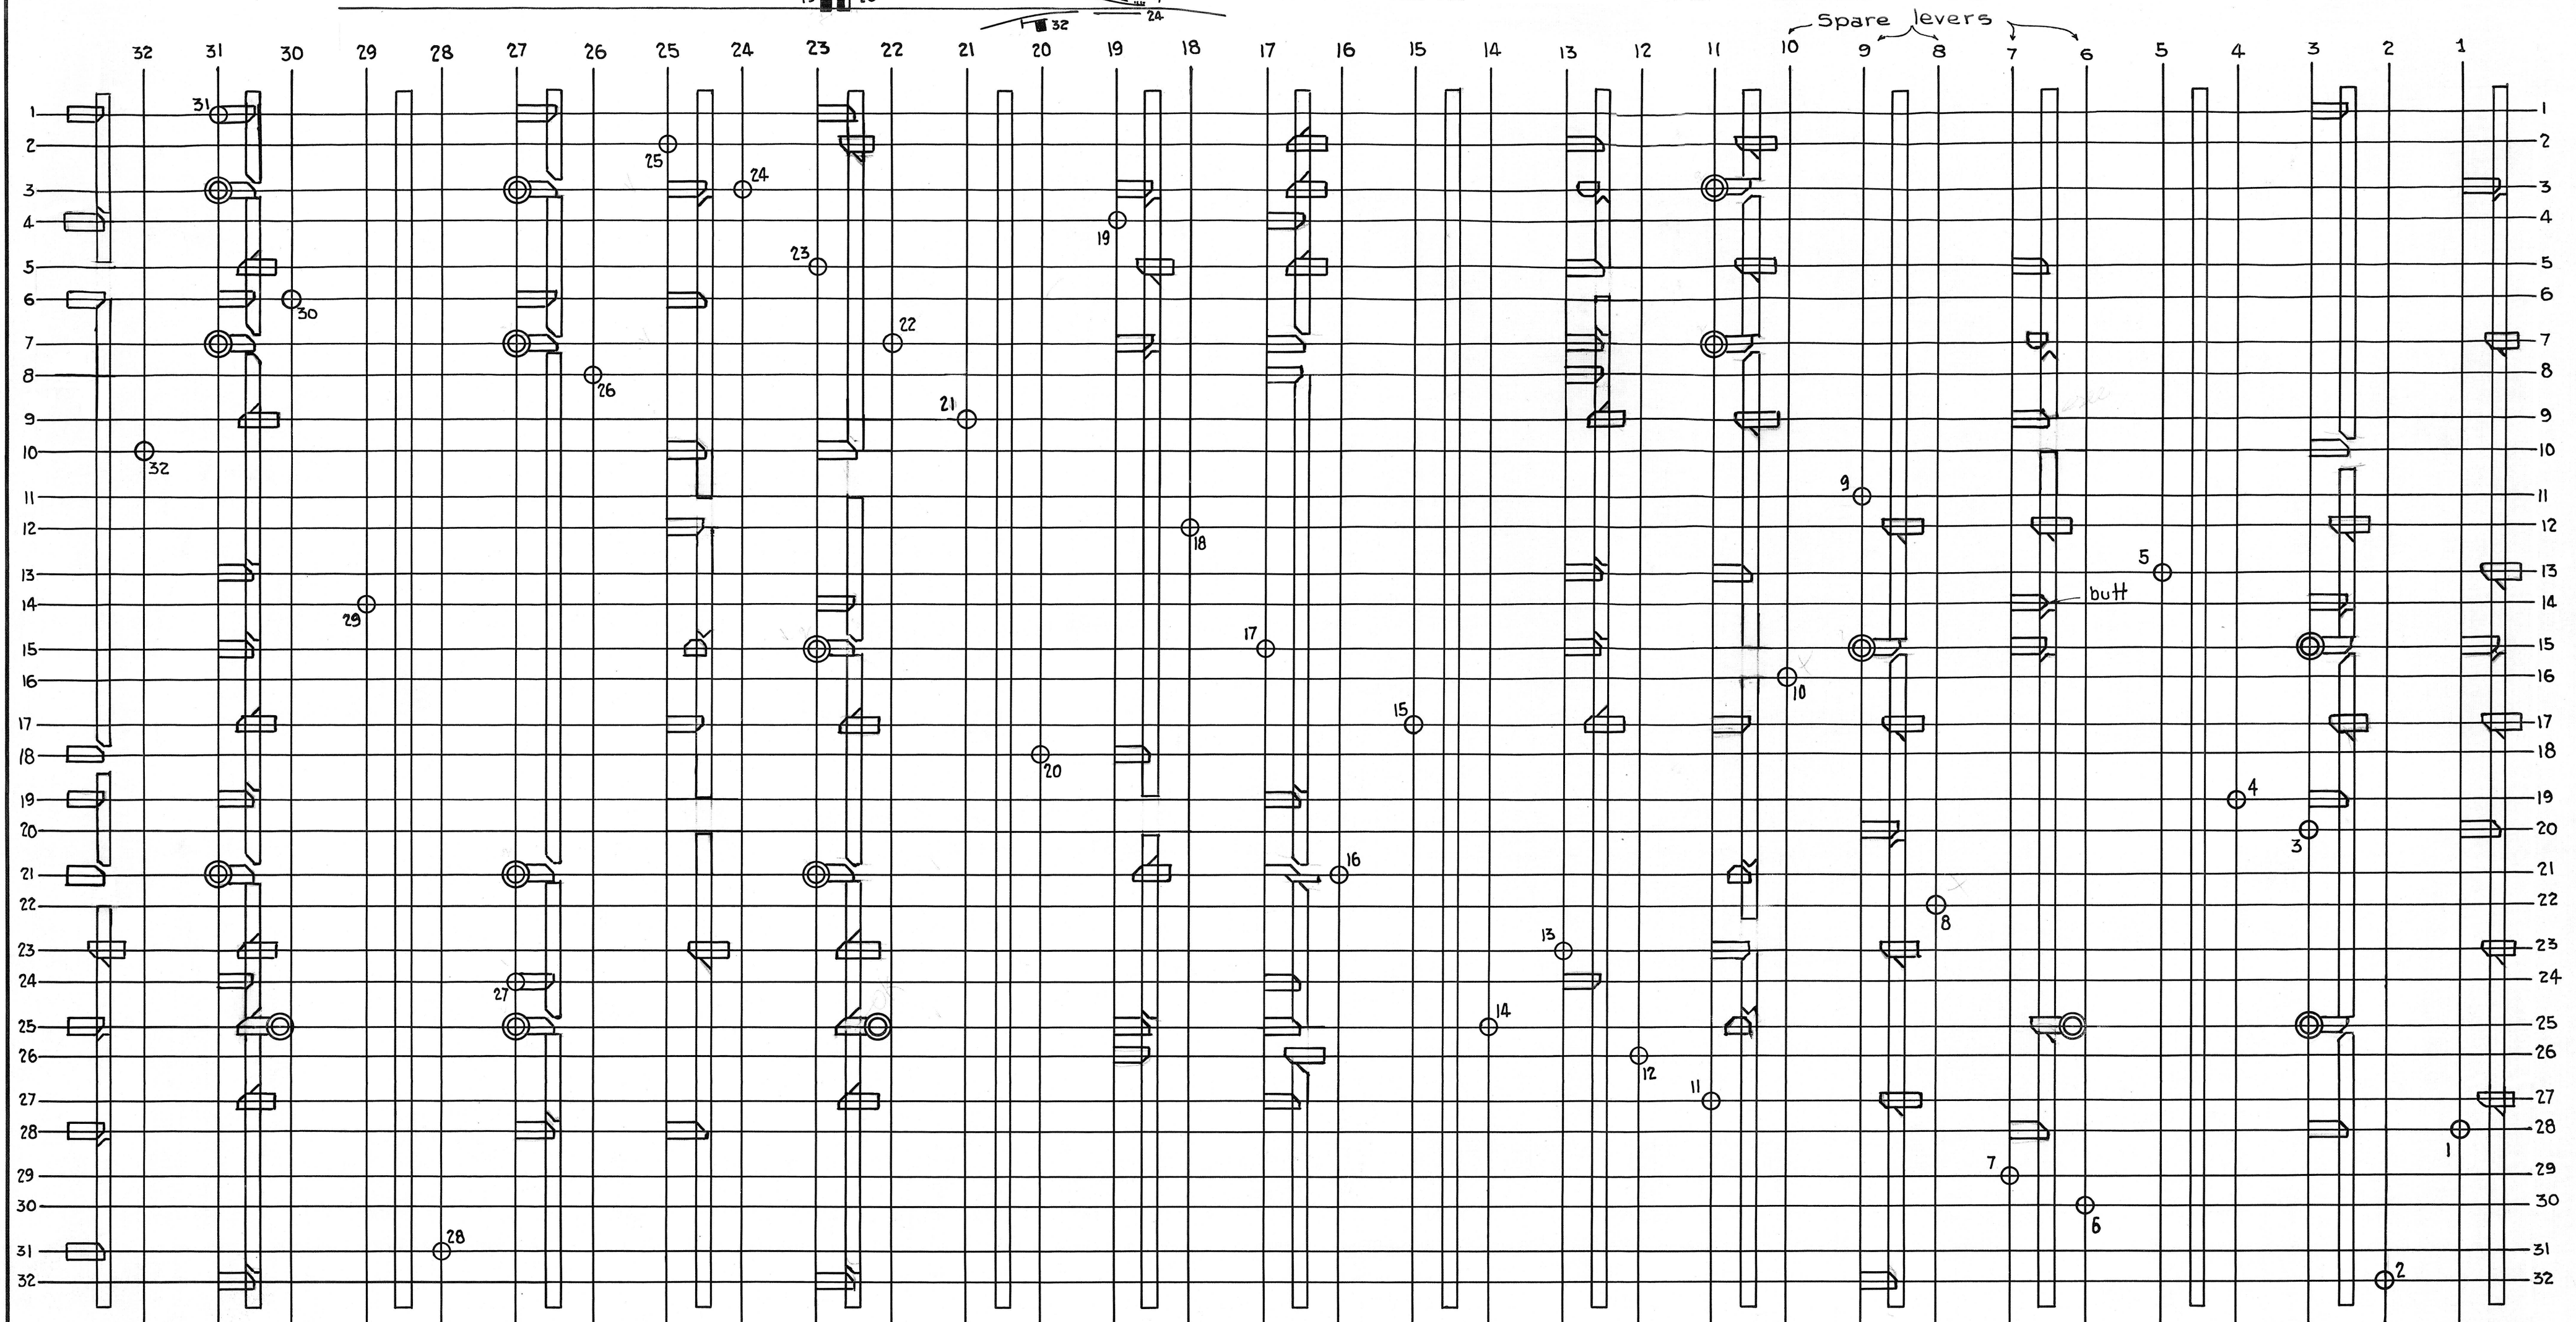

Drawn by: RB
 Checked by: RB
 Spec.
 Locking
 Approved: RB
 For G. R. S. Co.
 Approved:

For R.R. Co.